





Welling

MOTINOVA

SERVOTRO



Its products benefit nearly 3 billion consumers worldwide, with 70% of its business focused on green and sustainable products.



27
R&D & testing centers



5600+
Licensed Patents



51%
Research talents



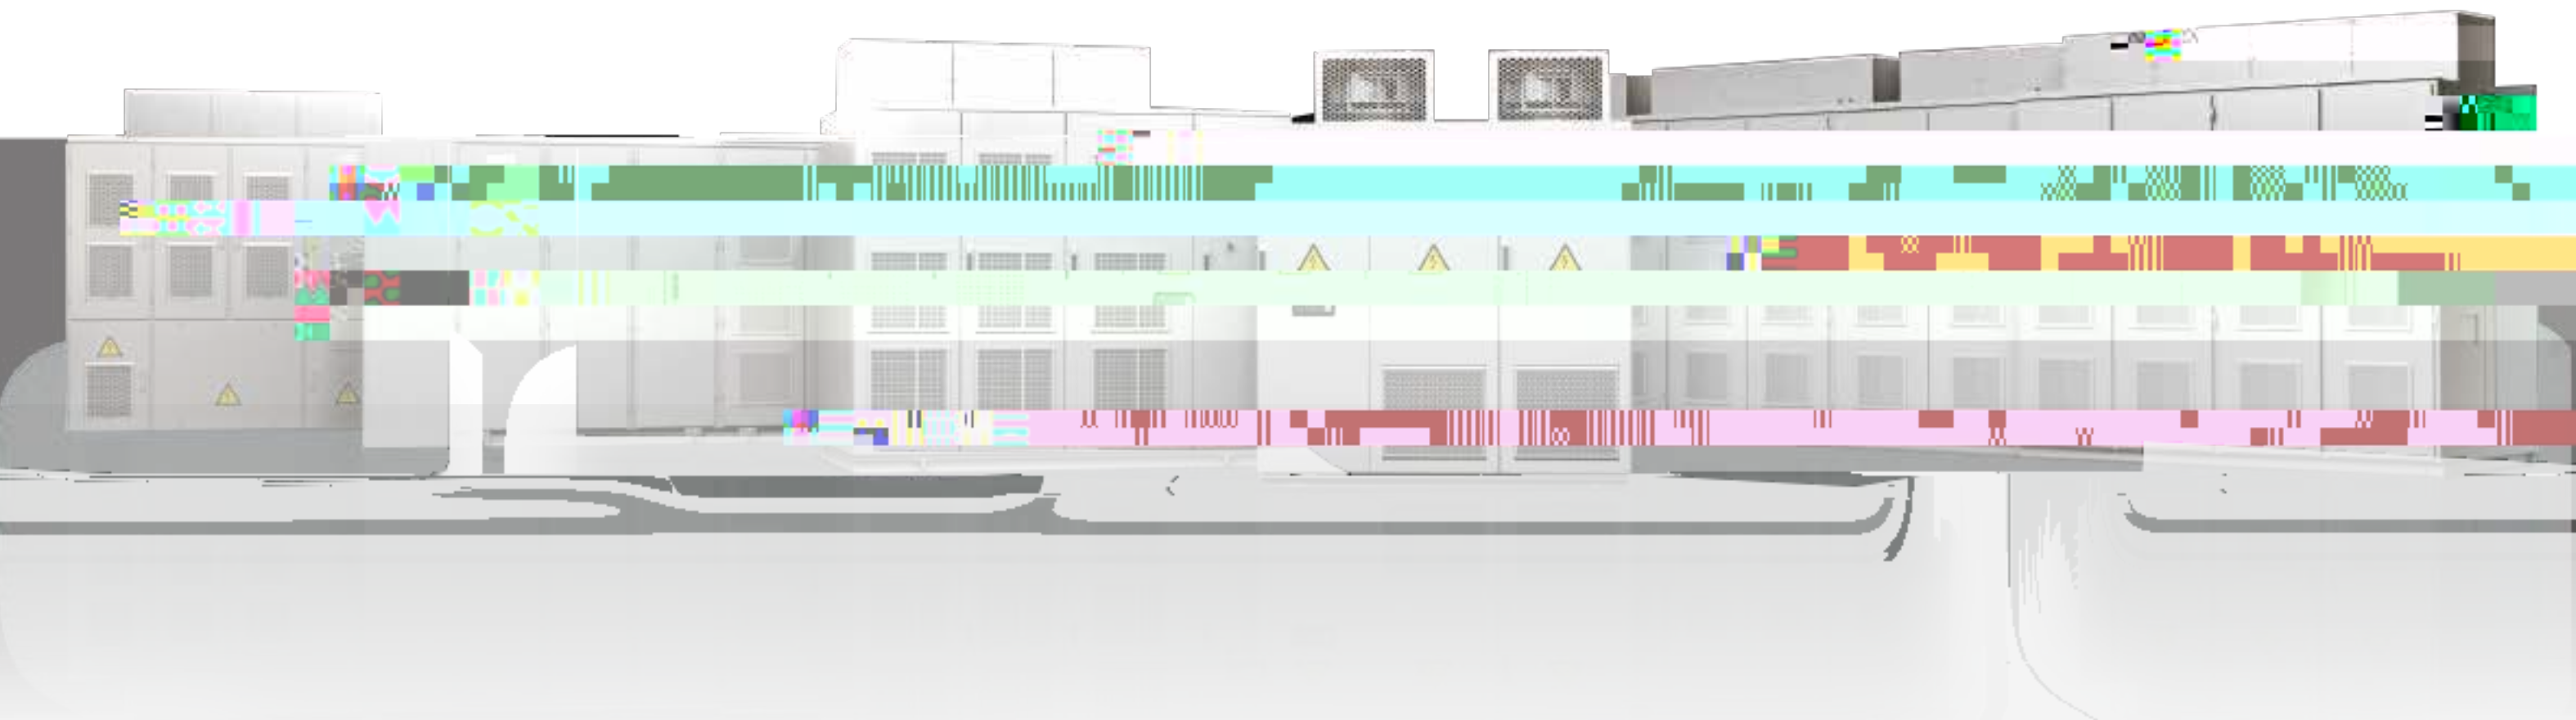
70
Drafted & participated
in the release of standards



Ma fac ri  ali






ro c a a Gla ce



ir-Cooler V D Sol io


5th Generation Double Side Operation

6kV

	Power	Capacity	Model	Weight (kg)	Dimensionn (W x D x H (mm))
MA1.1	200	250	HC1000-060/00250	1919	
	250	315	HC1000-060/00315	1969	
	315	400	HC1000-060/00400	2094	
	400	500	HC1000-060/00500	2154	
	450	560	HC1000-060/00560	2269	
	500	630	HC1000-060/00630	2349	
	560	700	HC1000-060/00700	2424	
	630	800	HC1000-060/00800	2464	
MA2.1	710	900	HC1000-060/00900	3550	
	800	1000	HC1000-060/01000	3678	
	900	1150	HC1000-060/01150	3758	
	1000	1250	HC1000-060/01250	3880	
	1120	1400	HC1000-060/01400	4084	
	1250	1600	HC1000-060/01600	4396	
MA3.1	1400	1800	HC1000-060/01800	5595	
	1600	2000	HC1000-060/02000	5755	
	1800	2250	HC1000-060/02250	5975	
	2000	2500	HC1000-060/02500	6140	
MA4.1	2250	2800	HC1000-060/02800	8358	
	2500	3200	HC1000-060/03200	8958	
	2800	3500	HC1000-060/03500	9858	
	3150	4000	HC1000-060/04000	10758	

5th Generation Double Side Operation

10kV

	Power	Capacity	Model	Weight (kg)	Dimensionn (W x D x H (mm))
ML1.1	220	275	HC1000-100/00275	2240	
	250	320	HC1000-100/00320	2260	
	280	350	HC1000-100/00350	2286	
	315	400	HC1000-100/00400	2316	
	355	450	HC1000-100/00450	2346	
	400	500	HC1000-100/00500	2383	
	450	560	HC1000-100/00560	2433	
	500	630	HC1000-100/00630	2483	
	560	700	HC1000-100/00700	2593	
	630	800	HC1000-100/00800	2719	
	710	900	HC1000-100/00900	2875	
	800	1000	HC1000-100/01000	3062	
ML2.1	900	1150	HC1000-100/01150	3192	
	1000	1250	HC1000-100/01250	3258	
	1120	1400	HC1000-100/01400	3409	
	1250	1600	HC1000-100/01600	4390	
	1400	1800	HC1000-100/01800	4648	
	1600	2000	HC1000-100/02000	4948	
ML3.1	1800	2250	HC1000-100/02250	5270	
	2000	2500	HC1000-100/02500	5604	
	2250	2800	HC1000-100/02800	5916	
	2500	3150	HC1000-100/03150	7678	
	2800	3500	HC1000-100/03500	8188	
ML4.1	3150	4000	HC1000-100/04000	8958	
	3550	4500	HC1000-100/04500	9308	
	4000	5000	HC1000-100/05000	11358	
	4500	5650	HC1000-100/05650	11958	
	5000	6300	HC1000-100/06300	12858	
	5600	7000	HC1000-100/07000	13758	

10kV

		275			
		320			
		350			
		400			
		450			
		500			
		560			
		630			
		700			
		800			
		900			
		1000			
		1150			
		1250			
		1400			
		1600			
		1800			
		2000			
		2250			
		2500			




ir-Cooler V D Sol io

5th Generation Front Side Operation

6.6kV



	Power	Capacity	Model	Weight (kg)	Dimensionn (W x D x H (mm))
MC1.1S	330	410	HC1000-066/00410	2792	
	420	520	HC1000-066/00520	2892	
	500	620	HC1000-066/00620	3042	
	570	710	HC1000-066/00710	3142	
	660	830	HC1000-066/00830	3192	
	750	930	HC1000-066/00930	3292	
MC2.1S	840	1050	HC1000-066/01050	3508	
	980	1230	HC1000-066/01230	3861	
	1070	1330	HC1000-066/01330	3915	
	1240	1550	HC1000-066/01550	4018	
	1400	1750	HC1000-066/01750	4224	
	1500	1870	HC1000-066/01870	4425	
MC3.1S	1650	2060	HC1000-066/02060	5280	
	1850	2310	HC1000-066/02310	5580	
	2110	2630	HC1000-066/02630	5940	
	2250	2800	HC1000-066/02800	5991	

4.16kV

	Power	Capacity	Model	Weight (kg)	Dimensionn (W x D x H (mm))
MJ1.1S	210	260	HC1000-416/00260	2331	
	260	330	HC1000-416/00330	2411	
	320	390	HC1000-416/00390	2511	
	360	450	HC1000-416/00450	2581	
	420	520	HC1000-416/00520	2611	
	470	590	HC1000-416/00590	2661	
MJ2.1S	530	660	HC1000-416/00660	2952	
	620	780	HC1000-416/00780	3084	
	670	840	HC1000-416/00840	3187	
	780	980	HC1000-416/00980	3228	
	890	1110	HC1000-416/01110	3392	
	940	1180	HC1000-416/01180	3493	
MJ3.1S	1040	1300	HC1000-416/01300	4080	
	1170	1460	HC1000-416/01460	4280	
	1330	1660	HC1000-416/01660	4430	
	1490	1860	HC1000-416/01860	4630	

5th Generation Front Side Operation

3.3kV

	Power	Capacity	Model	Weight (kg)	Dimensionn (W x D x H (mm))
MD1.1S	170	210	HC1000-033/00210	2236	
	210	260	HC1000-033/00260	2286	
	250	310	HC1000-033/00310	2386	
	290	360	HC1000-033/00360	2456	
	330	420	HC1000-033/00420	2486	
	380	470	HC1000-033/00470	2556	
MD2.1S	420	530	HC1000-033/00530	3114	
	490	620	HC1000-033/00620	3186	
	540	670	HC1000-033/00670	3228	
	620	780	HC1000-033/00780	3439	
	700	880	HC1000-033/00880	3472	
	750	940	HC1000-033/00940	3543	
MD3.1S	830	1030	HC1000-033/01030	3580	
	930	1160	HC1000-033/01160	3730	
	1060	1320	HC1000-033/01320	3930	
	1180	1480	HC1000-033/01480	3980	



a er-coole V D Sol io

4th Generation Double Side Operation

		8900			
		9000			
		10000			
		12500			
		12500			
		16000			
		16000			
		20000			
		20000			
		25000			
		25000			
		30000			
		30000 03008			

30001

30003 0

